

4.0T/4.5T/5.5T Lifting Capacity | Simply Pull Down One Handle | For Lowering



C9Z/C10Z



C12 Asymmetric or Symmetric




# C9Z/C10Z/C12

## ONE HAND OPERATION TWO POST LIFT

- 4.0T/4.5T/5.5T lifting capacity.
- Simply push one button for lowering.(C9Z/C10Z)
- Single side mechanical lock release.(C12)
- Cylinder straight top device, run more smoothly.
- The arm locks engage and disengage automatically.
- Users' safety is double guaranteed by using both mechanical latches and restrictive valves.
- Durable cylinders in each column with anti-surge valves.
- With vehicle roof protection.The power system switches off when vehicle roof touches the rubber protected overhead bar.
- Standard door protection pads to prevent possible damage to the door opened without caution.
- Pre-fixed hydraulic pressure prevents overloading operation.
- Standard chain protection curtain.
- 3-stage short arm and 2-stage long arm.(C9/C10)
- More Flexible Three Stage Arms.(C12)


### OVERALL DIMENSION

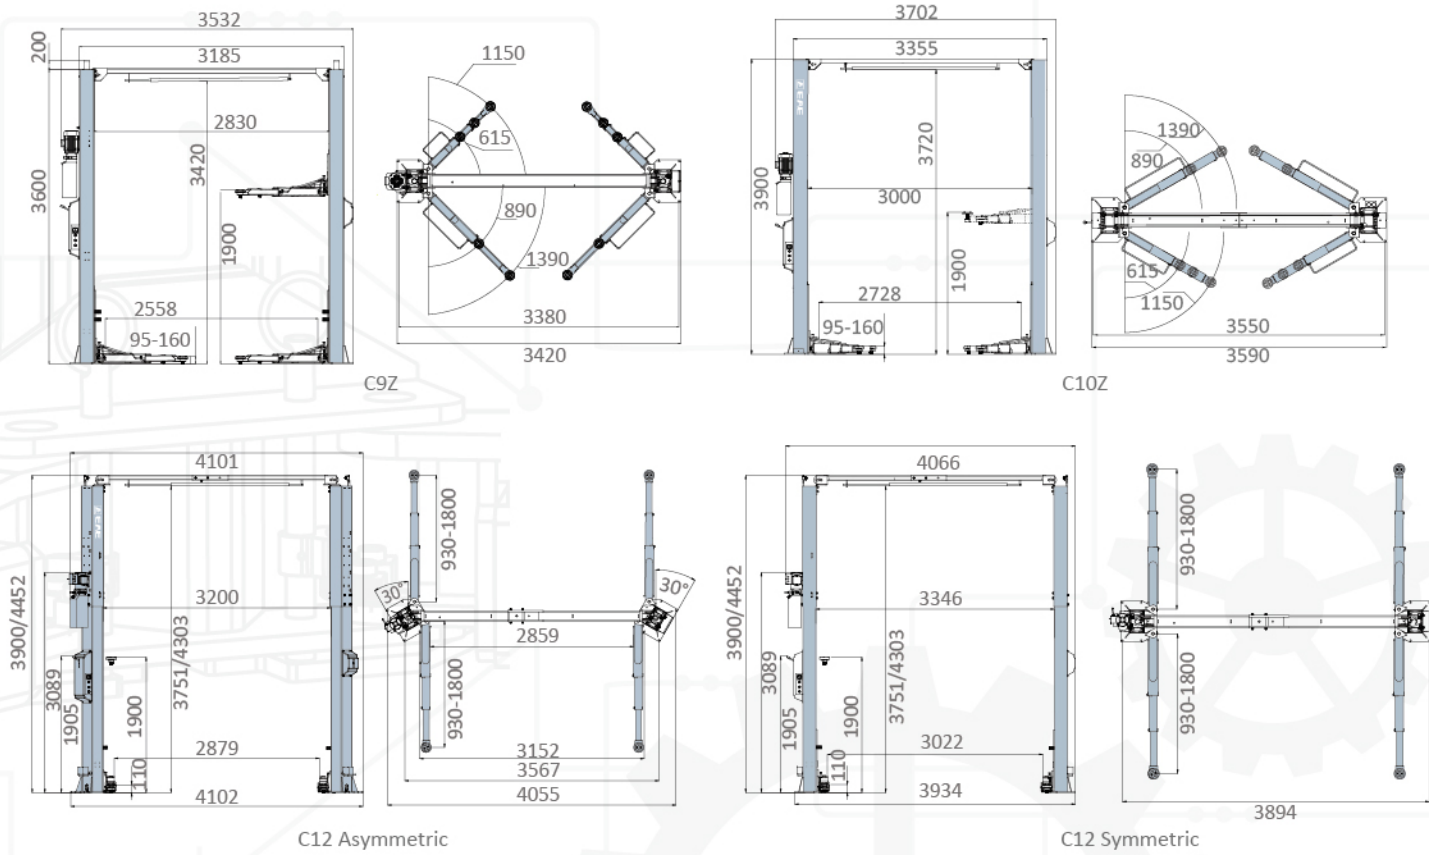

### TECHNICAL DATA

MODEL NO.	C9Z	C10Z	C12 Asymmetric	C12 Symmetric
Lifting capacity	4.0T	4.5T	5.5T	5.5T
Max lifting height	1900mm	1900mm	1900mm	1900mm
Min height	95mm	95mm	110mm	110mm
Lifting time	Approx.55S	Approx.55S	Approx.55S	Approx.55S
Capacity of motor	2.2kW	2.2kW	2.2kW	2.2kW
Overall Height	3600mm+200mm	3900mm	3900/4452mm	3900/4452mm
Drive through width	2558mm	2728mm	2879mm	3022mm
Electricity supply	According To Customer Needs			

\* Max. Lifting height is measured with adjustable screw pads at highest position.  
\* Machine shown with optional equipment. Actual product appearance may differ.

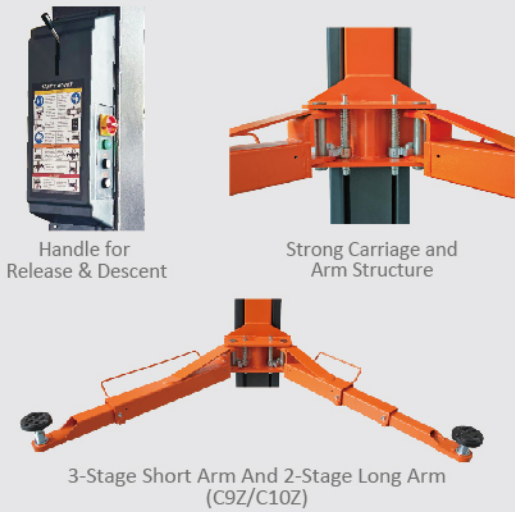

Handle for Release & Descent

Strong Carriage and Arm Structure

3-Stage Short Arm And 2-Stage Long Arm (C9Z/C10Z)

