

5.0T Max. Capacity | 5100MM Max. Platform Length | **CE**




6603BWF



Wheel Free Lift (3500kg)



Pneumatic Release System



Pneumatic Rear Side Slip



Mechanical Lock




6603


ALIGNMENT SCISSOR LIFT

- 4.2T/5.0T lifting capacity.
- Manual leveling (Automatic Leveling System or electrical leveling available).
- Infrared synchronization protection system.
- In-ground installation or above-ground installation with optional drive-on ramps.
- Long slip plate and adjustable turntable positions accommodate different sizes of wheelbases.
- Pneumatic safety locking system.
- The great planeness of runways is perfect for high accuracy wheel aligning.
- Driving-on ramps with polymer rollers.
- Reserved tracks on platforms fit for optional rolling jacks.(C Type)
- 24V safe control system.
- Self-lubricated bushing and bearing.
- Safety descent alarming buzzer.
- Aluminum motor, no risks of overheating.

OVERALL DIMENSION

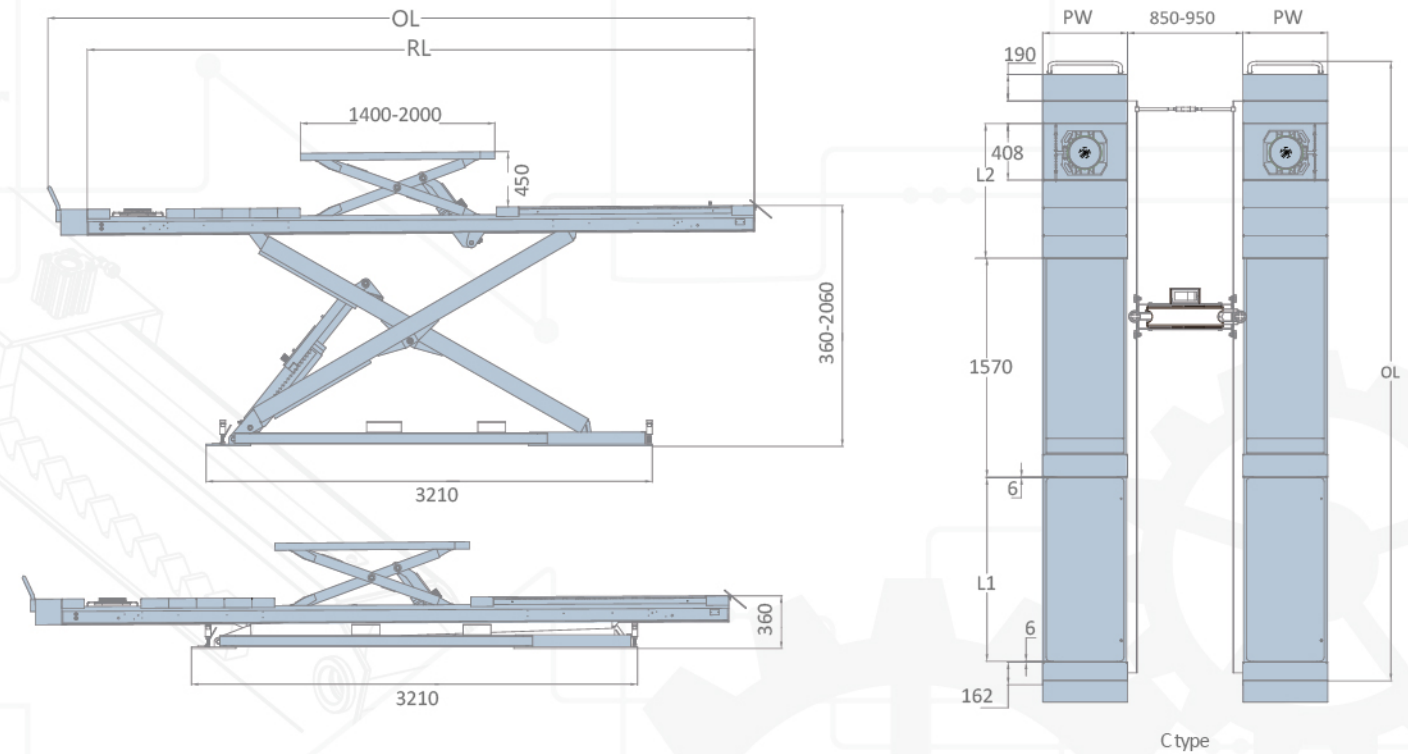

- S Flat platforms
- B Platforms with front recesses and rear slip plates
- BWF Platforms with front recesses rear slip plates, and wheel free lifts

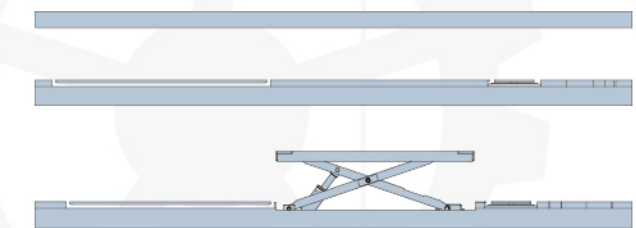

TECHNICAL DATA

Model No.	Lifting capacity	PW	RL	OL	L1	L2
6603S-48L(C)	4.2T	610	4800	5042	N/A	N/A
6603S-51L(C)	5.0T	610	5100	5342	N/A	N/A
6603B-48L(C)	4.2T	610	4800	5042	1520	1370
6603B-51L(C)	5.0T	610	5100	5342	1520	1570
6603BWF-48L(C)	4.2T	610	4800	5042	1520	1370
6603BWF-51L(C)	5.0T	610	5100	5342	1520	1570

* Machine shown with optional equipment. Actual product appearance may differ.

