

4.0T/4.5T/5.5T Lifting Capacity | Simply Pull Down One Handle For Lowering



C9Z/C10Z



C12 Asymmetric or Symmetric




# C9Z/C10Z/C12

## SINGLE-SIDE MANUAL RELEASE TWO-POST LIFT

- 4.0T/4.5T/5.5T lifting capacity.
- One-handle lowering control.
- Single side mechanical lock release.
- Chain-free, direct cylinder drive minimizes wear parts, lowering maintenance costs.
- The arm locks engage and disengage automatically.
- Users' safety is double guaranteed by using both mechanical latches and restrictive valves.
- Durable cylinders in each column with anti-surge valves.
- With vehicle roof protection. The power system switches off when vehicle roof touches the rubber protected overhead bar.
- Standard door protection pads to prevent possible damage to the door opened without caution.
- Pre-fixed hydraulic pressure prevents overloading operation.
- Standard chain protection curtain.
- 3-stage short arm and 2-stage long arm. (C9Z/C10Z)
- More Flexible Three Stage Arms. (C12)

### OVERALL DIMENSION

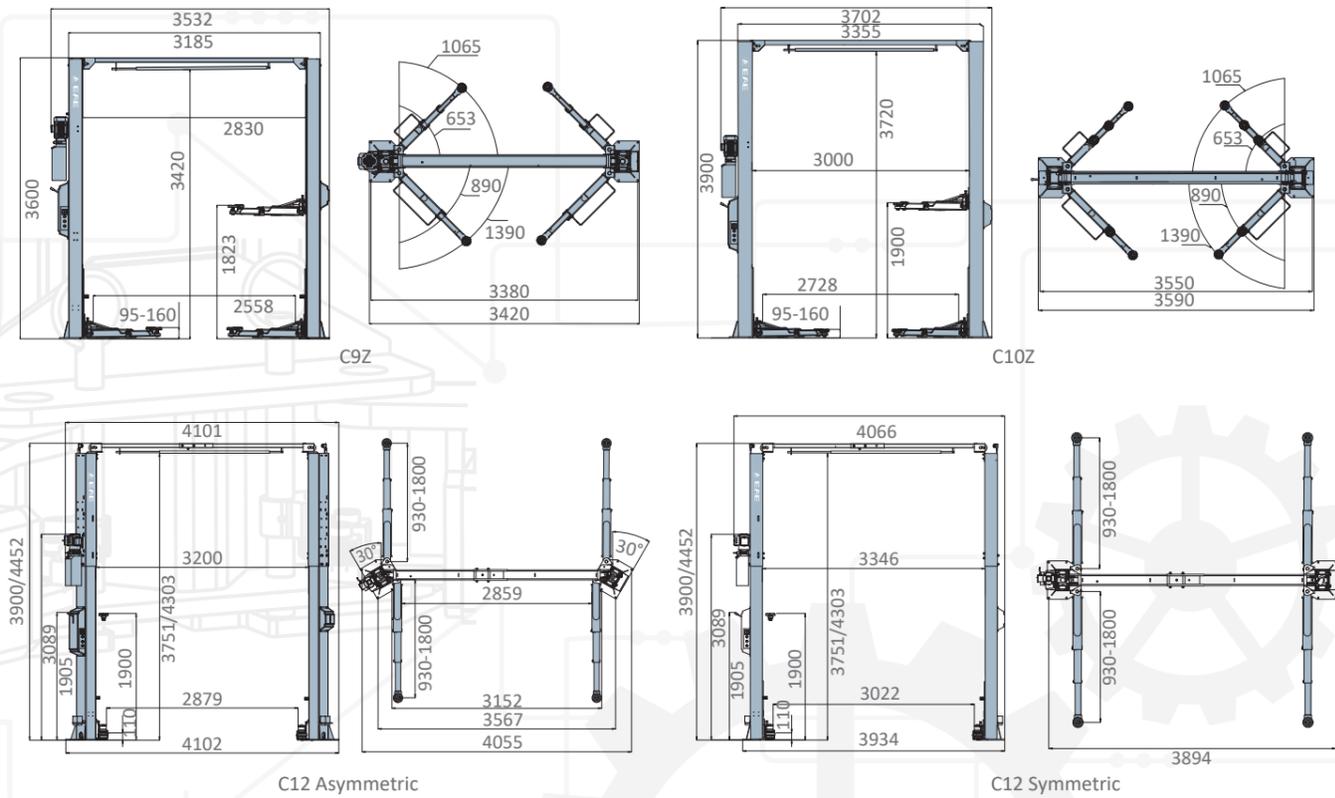

### TECHNICAL DATA

MODEL NO.	C9Z	C10Z	C12 Asymmetric	C12 Symmetric
Lifting capacity	4.0T	4.5T	5.5T	5.5T
Max lifting height	1823mm	1900mm	1900mm	1900mm
Min height	95mm	95mm	110mm	110mm
Lifting time	Approx.55S	Approx.55S	Approx.55S	Approx.55S
Capacity of motor	2.2kW	2.2kW	2.2kW	2.2kW
Overall Height	3600mm	3900mm	3900/4452mm	3900/4452mm
Drive through width	2558mm	2728mm	2879mm	3022mm
Electricity supply	According To Customer Needs			

\* Maximum lifting height is measured with threaded adapters fully extended.  
\* Depicted configuration includes optional equipment; actual product may vary.



Handle for Release & Descent



Strong Carriage and Arm Structure



3-Stage Short Arm And 2-Stage Long Arm (C9Z/C10Z)

